

# 商佑不銹鋼伸縮接頭

## STAINLESS STEEL EXPANSION JOINT

### ▲SF-400 系列

#### ◎ 說明

此型伸縮接頭係以多層極薄的SUS 304不銹鋼板結構而成，極適用於一般高壓管路及熱媒管路等高溫流體的熱脹吸收。


#### ◎ INSTRUCTION

This model of expansion joint is made of multi-coat extreme thin SUS304 Stainless plate's structure, suitable for using thermal liquid tube route for high-temperature liquid's thermal dilatation adsorption.

#### ◎ 構件 CONSTRUCTION


ITEM	PARTS	MATERIAL	REMARK
1	BELLOWS	SUS304	SUS316
2	FLANGES	SS-400	A105 / SUS304
3	INTERNAL SLEEVE	SUS304	
4	TIE RODS	SS-41	SUS304
5	TUBE END	SGP	SUS304 / 316

FLANGES TYPE : JIS, ANSI, BS, DIN

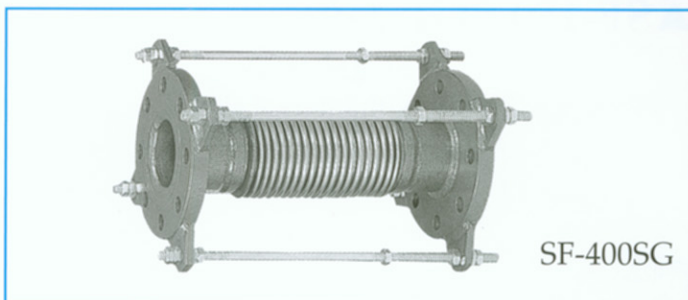


SF-400SG

SF-400SP 端管焊接型附內筒 (With sleeve) (For weld)

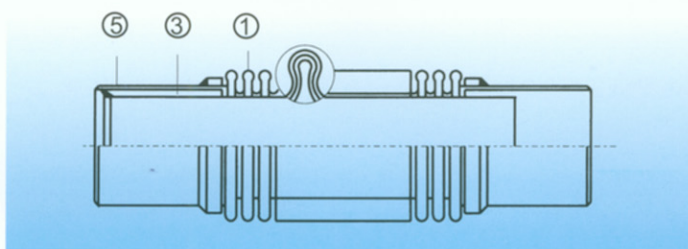

SF-400 SG

有內筒及設限螺桿 With internal sleeve and Tie Rod.

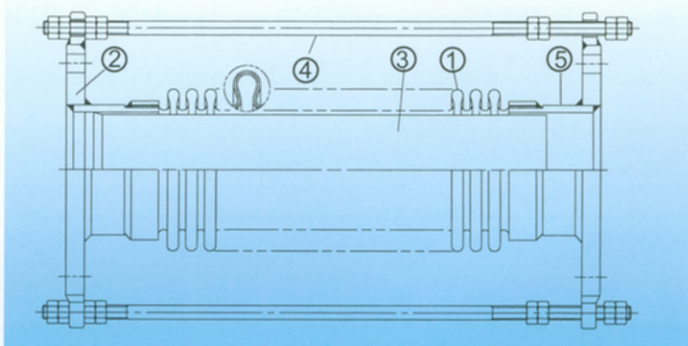

#### ◎ SF-400 系列性能規格表 SPECIFICATION

◎ 下述工作壓力以常溫25°C為基準

Nominal Bore 口徑		Total length 總長度		Effective Area 流體面積	Axias Movemen 伸縮量		Working Pressure 工作壓力
mm	Ins	mm	Ply	cm <sup>2</sup>	mm		Kg/cm <sup>2</sup>
40	1-1/2	350	2	17.6	+10	-40	25
50	2	350	2	30.4	+10	-40	25
65	2-1/2	350	2	43.8	+10	-40	25
80	3	350	2	62.8	+10	-40	25
100	4	350	2	107.7	+10	-40	25
125	5	350	2	162.9	+10	-40	25
150	6	350	2	227.5	+10	-40	25
200	8	350	3	385.3	+10	-40	25
250	10	350	3	670.1	+10	-40	25
300	12	350	3	923.5	+10	-40	25
350	14	350	3	1102	+10	-40	20
400	16	350	3	1464	+10	-40	20
450	18	350	3	1829	+10	-40	20
500	20	350	3	2235	+10	-40	20
600	24	350	3	3167	+10	-40	20

\*口徑26" 以上規格另行提供。 \* The specifications are more than caliber 26" to be provided separately.