
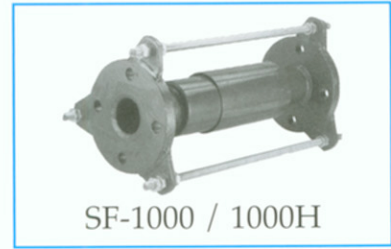


# 商佑不銹鋼外筒保護伸縮接頭

## STAINLESS STEEL EXTERNAL COVER EXPANSION JOINT

### ▲SF-1000/1000H 系列

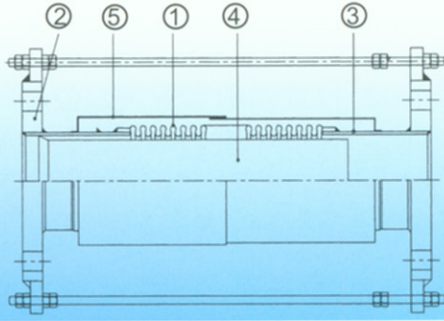

SF-1000 / 1000H

### ◎ 構件 CONSTRUCTION

ITEM	PARTS	MATERIAL	REMARK
1	BELLOWS	SUS304	SUS316
2	FLANGE	SS400	SUS304 / 316 (OPTION)
3	TUBE END	SGP	SUS304 / 316 (OPTION)
4	INTERNAL SLEEVE	SUS304	
5	EXTERNAL COVER	SS400	SUS304 / 316 (OPTION)

### ◎ 應用

適用於高溫及室外等特殊工作場所。

### ◎ APPLICATION

Apply in suing like as high temperature, outdoor and so on, special work place.

### ◎ SF-1000 系列性能規格表 SPECIFICATION (中、低壓用) ◎ 下述工作壓力以常溫25°C為基準

Nominal Bore □ 徑		Total Length 總長度	Bellows		Effective Area 流體面積	Axial Movement 伸縮量		Working Pressure 工作壓力
mm	Ins		O.D. 外徑	Corr's No. 山數		cm <sup>2</sup>	mm	
40	1-1/2	400	58	26	22.2	+10 -30	10	
50	2	400	70	24	34.4	+10 -35	10	
65	2-1/2	400	86	20	52.5	+10 -35	10	
80	3	400	101	20	71.2	+10 -40	10	
100	4	400	128	16	110.5	+10 -40	10	
125	5	400	157	15	168.7	+10 -40	10	
150	6	400	185	14	233.9	+10 -40	10	
200	8	400	243	13	389.1	+10 -40	10	
250	10	400	297	12	592.2	+10 -40	10	
300	12	400	348	12	829.7	+10 -40	10	
350	14	400	380	12	1102	+10 -40	10	

### ◎ SF-1000H 系列性能規格表 SPECIFICATION (高壓用) ◎ 下述工作壓力以常溫25°C為基準

Nominal Bore □ 徑		Total Length 總長度	Bellows		Effective Area 流體面積	Axial Movement 伸縮量		Working Pressure 工作壓力
mm	Ins		O.D. 外徑	Corr's No. 山數		cm <sup>2</sup>	mm	
40	1-1/2	400	58	32	17.6	+10 -40	25	
50	2	400	70	24	30.4	+10 -40	25	
65	2-1/2	400	86	20	43.8	+10 -40	25	
80	3	400	101	20	62.8	+10 -40	25	
100	4	400	128	16	107.7	+10 -40	25	
125	5	400	157	15	162.9	+10 -40	25	
150	6	400	185	14	227.5	+10 -40	25	
200	8	400	243	13	385.3	+10 -40	25	
250	10	400	297	12	670.1	+10 -40	25	
300	12	400	348	12	923.5	+10 -40	25	
350	14	400	380	12	1102	+10 -40	25	

※ 口徑16" 以上規格另行提供。 ※ The specifications are more than caliber 16" to be provided separately.