

商佑不銹鋼防震接頭

STAINLESS STEEL FLEXIBLE JOINT

▲SF-500T 系列


◎ 說明

- 取代橡膠接頭，以隔絕泵浦、空氣壓縮機，冷凍空調設備的震動並吸收其噪音。
- 吸收高溫管線所產生的熱膨脹。
- 連接輕微的配管偏斜並消除其應力。

◎ INSTRUCTION

- Substitute rubber joint to isolate the vibration of pump, air-compressor & airconditioning. And to reduce the noise of pipe.
- Absorb thermal growth motion.
- Compensate for misalignment-Eliminate the stresses.

SF-500T

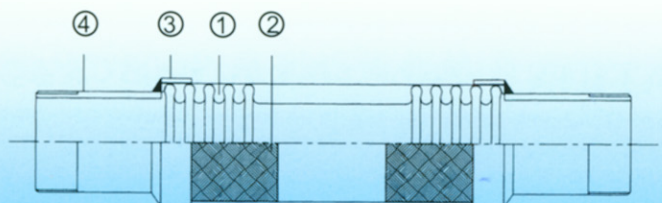

◎ 應用

- 設備端與管路銜接用
- 小型泵浦與管路銜接用
- 工業用小口徑防震接頭
- 管路水錘振動吸收



SF-500T

◎ APPLICATION

- Using equipment point to link with tube route.
- Using small-scale pump to link with tube route.
- Using industrial small-bore shockproof joint.
- Using water hammer vibrate recruiting in tube route.

◎ 構件 CONSTRUCTION

| ITEM | PARTS | MATERIAL | REMARK |
|------|-------------|----------|---------------|
| 1 | BELLOWS | SUS304 | SUS316 |
| 2 | WIRE BRAIDS | SUS304 | |
| 3 | SEAL RING | SUS304 | SUS316 |
| 4 | TUBE END | SUS304 | SUS316 PT或NPT |

◎ SF-500T系列性能規格表 SPECIFICATION

◎ 下述工作壓力以常溫25°C為基準

| TYPE 型號 | Nominal Bore 口徑 | | Total Length 總長度 | | Bellows | Max offset 最大振幅 | Working Pressure: 工作壓力 | |
|------------|--------------------|-------|---------------------|-----|---------|--------------------|---------------------------|--------------------|
| | mm | Ins | mm | Ins | O.D. | | PSI | Kg/cm ² |
| | | | | | 外徑 | | | |
| SF500T | 15 | 1/2 | 250 | 10 | 30.5 | 20 | 300 | 20 |
| SF500T | 20 | 3/4 | 250 | 10 | 30.5 | 20 | 300 | 20 |
| SF500T | 25 | 1 | 250 | 10 | 38 | 20 | 300 | 20 |
| SF500T | 32 | 1-1/4 | 250 | 10 | 46 | 18 | 300 | 20 |
| SF500T | 40 | 1-1/2 | 300 | 12 | 56 | 16 | 300 | 20 |
| SF500T | 50 | 2 | 300 | 12 | 70 | 15 | 300 | 20 |
| SF500T | 65 | 2-1/2 | 350 | 14 | 86.5 | 14 | 300 | 20 |
| SF500T | 80 | 3 | 350 | 14 | 101.5 | 12 | 300 | 20 |