

# 商佑不銹鋼防震接頭


## STAINLESS STEEL FLEXIBLE JOINT

### ▲SF-500 系列

#### ◎ 說明

SF-500型/500H型為免焊型防震接頭，可避免焊接型之焊接粒界腐蝕及防止法蘭鐵銹流入管路中。使用壽命較一般橡膠防震接頭長。在一般及中、低溫高壓環境下，更能發揮最佳的防震及減低噪音效果。

SF-500/500H

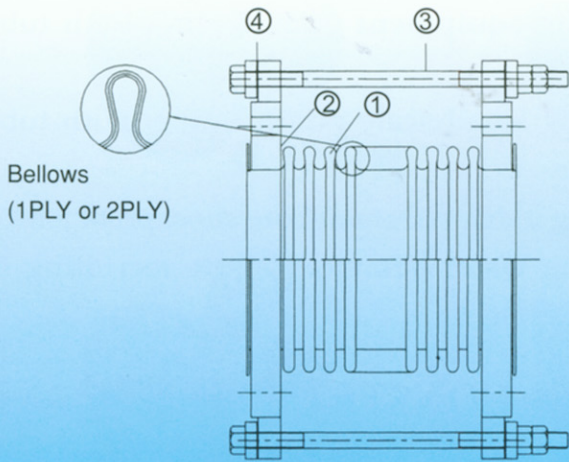

#### ◎ INSTRUCTION

SF-500 model/500H model are free-welded shockproof joint, can avoid the welded type to cause welding corrode and to prevent flange scale flowing into tube route. Using life is longer than general rubber shockproof joint. Under the general and middle, low temperature high- pressure conditions, can elaborate the best shock resistance and reduce noise effects.



SF-500

#### ◎ 構件 CONSTRUCTION

ITEM	PARTS	MATERIAL	REMARK
1	BELLOWS	SUS304	SUS316
2	FLANGES	FCD40	A105 / SUS304
3	TIE RODS	SS-41	SUS304
4	GASKET	RUBBER	

FLANGES TYPE : JIS , ANSI , BS , DIN

### ◎ SF-500 系列性能規格表 SPECIFICATION

◎ 下述工作壓力以常溫25°C為基準

TYPE 型號	Nominal Bore 口徑		Total Length 總長度		Bellows		Max offset 最大振幅 mm	Working Pressure 工作壓力	
	mm	Ins	mm	Ins	O.D. 外徑	Corr's No. 山數		PSI	Kg / cm <sup>2</sup>
SF500	50	2	150	6	70	20	15	150	10
SF500H						19		300	20
SF500	65	2-1/2	150	6	86	19	14	150	10
SF500H						17		300	20
SF500	80	3	150	6	101	18	12	150	10
SF500H								300	20
SF500	100	4	150	6	128	14	10	150	10
SF500H								300	20
SF500	125	5	150	6	157	12	8	150	10
SF500H								300	20
SF500	150	6	150	6	185	11	6	150	10
SF500H								300	20
SF500	200	8	200	8	243	15	8	150	10
SF500H								300	20
SF500	250	10	200	8	297	13	6	150	10
SF500H								300	20
SF500	300	12	200	8	348	12	5	150	10
SF500H								300	20
SF500	350	14	230	9	397	11	3	150	10
SF500H								300	20
SF500	400	16	230	9	461.4	9	3	150	10
SF500H								300	20
SF500	450	18	230	9	512.2	9	3	150	10
SF500H								300	20
SF500	500	20	230	9	563	9	3	150	10
SF500H								300	20

\*口徑 22" 以上規格另行提供。 \* The specifications are more than caliber 22" to be provided separately.